


# Product Description

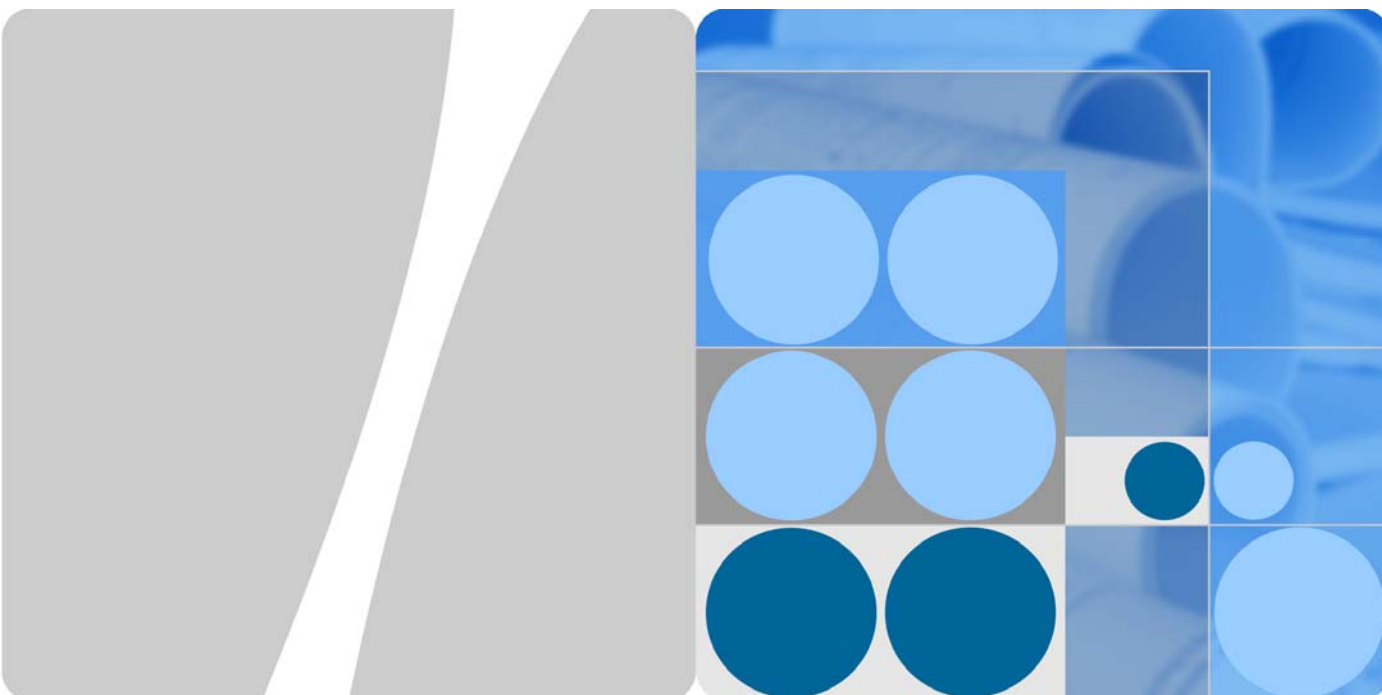

HUAWEI E367 HSPA+ USB Rotator  
V100R001

**Issue** 01  
**Date** 2010-06-10

HUAWEI TECHNOLOGIES CO., LTD.



Huawei Technologies Co., Ltd. provides customers with comprehensive technical support and service. Please feel free to contact our local office or company headquarters.

## Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base  
Bantian, Longgang  
Shenzhen 518129  
People's Republic of China

Website: <http://www.huawei.com>

Email: [support@huawei.com](mailto:support@huawei.com)

**Copyright © Huawei Technologies Co., Ltd. 2009. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

### Trademarks and Permissions



**HUAWEI** and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

### Notice

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute the warranty of any kind, express or implied.

## About This Document

---

### Summary

This document provides information about the major functions, supported services, system architecture, and technical references of HUAWEI E367 HSPA+ USB Rotator (hereinafter referred to as the E367).

The following table lists the contents of this document.

Chapter	Describes
1 Overview	The supported network modes, basic services and functions, and the appearance of the E367.
2 Features	The supported features and technical specifications of the E367.
3 Services and Applications	The services and applications of the E367.
4 System Architecture	The architecture of the E367.
5 Technical Reference	The technical references of the E367.
6 Packing List	The items contained in the package of the E367.
A Acronyms and Abbreviations	The acronyms and abbreviations mentioned in this document.

## History

Issue	Details	Date	Author	Approved by
01	Initial draft completed.	2010-06-10		

# Contents

<b>1 Overview .....</b>	<b>6</b>
<b>2 Features .....</b>	<b>7</b>
2.1 Main Features .....	7
2.2 Technical Specifications .....	8
2.2.1 Hardware .....	8
2.2.2 Dashboard .....	9
<b>3 Services and Applications .....</b>	<b>11</b>
3.1 Packet Data Service .....	11
3.2 SMS .....	11
<b>4 System Architecture .....</b>	<b>12</b>
4.1 System Architecture .....	12
4.2 Functional Modules .....	13
<b>5 Technical Reference .....</b>	<b>14</b>
5.1 Layer 1 Specifications (Physical) .....	14
5.2 Layer 2 Specifications (MAC/RLC) .....	14
5.3 Layer 3 Specifications (RRC) .....	14
5.4 Layer 3 NAS/Core Network (MM/CM) .....	14
5.5 GSM Protocol Specifications .....	15
5.6 GPRS Protocol Specifications .....	15
5.7 General Specifications .....	15
5.8 Performance/Test Specifications .....	16
5.9 SIM Specifications .....	16
<b>6 Packing List .....</b>	<b>17</b>

# 1 Overview

The E367 supports the following standards:

- High-speed packet access plus (HSPA+)
- Universal Mobile Telecommunications System (UMTS)
- Enhanced data rates for global evolution (EDGE)
- General packet radio service (GPRS)
- Global system for mobile communications (GSM)

The E367 provides the following services:

- HSPA+ packet data service
- HSUPA packet data service
- HSDPA/UMTS packet data service
- EDGE/GPRS packet data service
- WCDMA/GSM Short Message Service (SMS)

You can connect the E367 with the USB interface of a computer. In the service area of the HSPA+/UMTS/EDGE/GPRS/GSM network, you can surf the Internet and send/receive messages/emails cordlessly. The E367 is fast, reliable, and easy to operate. Thus, mobile users can experience many new features and services with the E367. These features and services will enable a large number of users to use the E367 and the average revenue per user (ARPU) of operators will increase substantially.

Figure 1-1 shows the profile of the E367.



**Figure 1-1** E367 profile

# 2 Features

---

## 2.1 Main Features

The E367 mainly supports the following features:

- HSPA+/UMTS 2100/1900/900/850MHz, GSM/GPRS/EDGE 850/900/1800/1900 MHz
- Equalizer and receive diversity (TYPE 3)
- 28.8Mbit/s MIMO ready;
- HSDPA data service of up to 21.6 Mbps
- HSUPA data service of up to 5.76
- UMTS PS domain data service of up to 384 kbps
- EDGE packet data service of up to 236.8 kbps
- GPRS packet data service of up to 85.6 kbps
- SMS based on PS domain of GSM and WCDMA
- Automatic installation
- Personal computer/Smart card (PC/SC) Driver
- NDIS Driver
- USB Rotator, easy to connect
- Dual internal antenna
- Standard USB interface (Type A)
- External antenna interface
- Micro Secure Digital Memory (Micro SD) Card
- Windows 2000/ Windows XP/ Windows Vista/ MAC Linux operating system (OS)

## 2.2 Technical Specifications

### 2.2.1 Hardware

Table 2-1 lists the hardware specifications.

**Table 2-1** Hardware specifications

Item	Specifications
Technical standard	GSM/GPRS/EGPRS R99 WCDMA/HSDPA R5, HSUPA R6, HSPA+ R7
Operating frequency	WCDMA/HSPA+ 2100MHz: 1920MHz~1980 MHz(Uplink)/2110MHz~2170 MHz(Downlink) WCDMA/HSPA+ 1900MHz: 1850MHz~1910MHz(Uplink)/1930MHz~1990MHz(Downlink) WCDMA/HSPA+ 900MHz: 880MHz~915MHz(Uplink)/925MHz~960 MHz(Downlink) WCDMA/HSPA+ 850MHz: 824MHz~849MHz(Uplink)/869MHz~894MHz(Downlink) GSM/GPRS/EDGE 900MHz: 880MHz~915MHz(Uplink)/925MHz~960 MHz(Downlink) GSM/GPRS/EDGE 1800MHz: 1710MHz~1785MHz(Uplink)/1805MHz~ 1880MHz (Downlink) GSM/GPRS/EDGE 1900MHz: 1850MHz~1910MHz(Uplink)/1930MHz~ 1990MHz(Downlink)
External interfaces	USB 2.0 High Speed
	SIM/USIM card: standard 6-pin SIM card interface
	External antenna interface
	Micro SD Card Slot
Maximum transmitter power	WCDMA/HSPA+ 2100/1900/900/850MHz: 24dBm +1/-3 (Power Class 3)
	GSM/GPRS 850MHz/900MHz: +33dBm (Power Class 4)
	GSM/GPRS 1800MHz/1900MHz: +30dBm (Power Class 1)
	EDGE 850MHz/900MHz+27dBm (Power Class E2)
	EDGE 1800MHz/1900MHz: +26dBm (Power Class E2)
Static receiver sensitivity	WCDMA/HSPA+ 2100/1900/900/850MHz: Compliant with 3GPP TS 25.101(R7)



Item	Specifications
	GSM/GPRS/EDGE 850 MHz/900 MHz/1800 MHz/1900 MHz: Compliant with 3GPP TS 05.05 (R99)
Maximum power consumption	<3.0W
Power supply	4.75V-5.25V / 500mA
LED	indicating the status of the E367
Dimensions (D × W × H)	84mm x 27mm x 12 mm
Weight	<30g
Temperature	<ul style="list-style-type: none"><li>• Operating: -10℃ to +45℃</li><li>• Storage: -20℃ to +70℃</li></ul>
Humidity	5% to 95%
<b>Notes:</b> 3GPP = The 3rd Generation Partnership Project EGPRS = enhanced GPRS LED = light-emitting diode MSC = mobile switching center SIM = subscriber identity module TS = technical specification USIM = UMTS subscriber identity module	

## 2.2.2 Dashboard

Two types of dashboards are available, the Windows dashboard Mac dashboard and Linux dashboard. The following table takes Windows dashboard as an example.

Table 2-2 lists the dashboard specifications.

**Table 2-2** Dashboard specifications

Item	Description
SMS	Writing/Sending/Receiving
	Sending/Receiving extra-long messages
	Group sending
	Storage: The messages are saved in the hard disk of the PC.
	Sorting
	New message prompt (visual prompt/audio prompt)

Item	Description
Flow display and statistics (data services)	Current connection: <ul style="list-style-type: none"> <li>• Duration</li> <li>• Send/Receive flow</li> <li>• Send/Receive rate</li> </ul>
	Traffic statistics
Phonebook	Capacity: It depends on the SIM/USIM card capacity or the hard disk space.
	Messages can be sent from the phonebook.
	Importing/Exporting: Import/Export contacts between the SIM/USIM card and a laptop or a file of supported formats.
Network connection setup	<ul style="list-style-type: none"> <li>• APN management</li> <li>• Set up network connection</li> </ul>
Software installation	Automatic installation
Other	Network connection settings: <ul style="list-style-type: none"> <li>• Automatic network selection and registration</li> <li>• Manual network selection and registration</li> </ul>
	Network status display: signal, operator name, system mode, and so on.
	Selection of network connection types.
	PIN management: activate/deactivate PIN, PIN lock, changing PIN, unblocking by using the PUK.
System requirement	<ul style="list-style-type: none"> <li>• Windows 2000 SP4, Windows XP SP2, Windows Vista</li> <li>• Mac OS X 10.4 and 10.5 with latest upgrades</li> <li>• Your computer's hardware system should meet or exceed the recommended system requirements for the installed version of OS</li> <li>• Display resolution: 800 × 600 or above</li> </ul>
<b>Notes:</b> PIN = personal identification number PUK = PIN unblocking key	

# 3

## Services and Applications

---

### 3.1 Packet Data Service

The E367 supports the PS domain data service based on HSPA+/UMTS /EDGE/GPRS

After you connect the E367 to a PC with the USB interface, the E367 driver and the client software are installed on the PC automatically. You can configure APN through the E367 application (or directly use the default settings) and set up a network connection. Then you can send or receive E-mail, access the network through wireless connection, and download files through wireless data channels.

To use the data service, perform the following steps:

1. Enter **\*99#** or **\*98#** to launch the packet data service.
2. In the **Choose Connection Type** dropdown box, choose a network type.

### 3.2 SMS


The E367 supports message writing/sending/receiving and group sending. You can manage messages through the dashboard, such as sorting the messages by telephone number or time.

# 4 System Architecture

## 4.1 System Architecture

Figure 4-1 shows the system architecture.

**Figure 4-1** System architecture

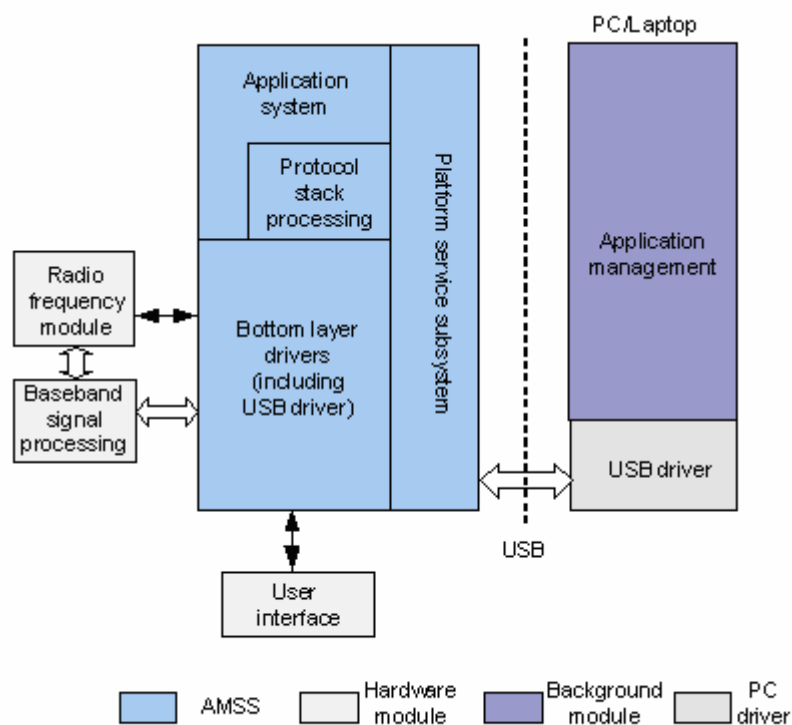

## 4.2 Functional Modules

### Radio Frequency Module

It sends/receives radio signals and modulates/demodulates the radio frequency (RF) signals and baseband signals.

### Baseband Signal Processing

It processes HSPA+/UMTS/EDGE/GPRS/GSM baseband digital signals, including:

- Modulating/Demodulating HSPA+/UMTS baseband signals
- Modulating/Demodulating EDGE/GPRS/GSM baseband signals
- Encoding/Decoding HSPA+/UMTS channel
- Encoding/Decoding EDGE/GPRS/GSM channel

### Bottom Layer Driver

It drives peripherals, including USB, LED, Micro-SD and SIM/USIM.

### Platform Service Subsystem

It initializes programs, diagnoses the running of the system, downloads data and serves as a watchdog.

### Protocol Stack System

It processes protocols of HSPA+/UMTS/EDGE/GPRS/GSM.

### Application System

It sends laptop commands to the bottom layer protocol for processing and returns the value to the laptop.

Existing applications include the following:

- Call management
- Message management
- CS/PS domain service management

### User Interface

It provides interfaces to connect peripherals. Interfaces are for LED Micro-SD and SIM/USIM.

### Application Management

Through the application window, you can set the parameters of the E367 and operate the E367.

# 5

## Technical Reference

---

### 5.1 Layer 1 Specifications (Physical)

- Examples of Channel Coding and Multiplexing TR 25.944
- Physical Layer–General Description TS 25.201
- Physical Channels and Mapping of Transport Channels onto Physical Channels (FDD) TS 25.211
- Multiplexing and Channel Coding (FDD) TS 25.212
- Spreading and Modulation (FDD) TS 25.213
- Physical Layer–Procedures (FDD) TS 25.214
- Physical Layer–Measurements (FDD) TS 25.215
- 3GPP HSDPA overall description 25.308
- 3GPP UE radio access capabilities 25.306

### 5.2 Layer 2 Specifications (MAC/RLC)

- MAC Protocol Specification TS 25.321
- RLC Protocol Specification TS 25.322

### 5.3 Layer 3 Specifications (RRC)

- UE Interlayer Procedures in Connected Mode TS 25.303
- UE Procedures in Idle Mode TS 25.304
- RRC Protocol Specification TS 25.331

### 5.4 Layer 3 NAS/Core Network (MM/CM)

- Architectural Requirements for Release 1999 TS 23.121
- NAS Functions Related to Mobile Station (MS) in Idle Mode TS 23.122
- Mobile Radio Interface Signaling Layer 3–General Aspects TS 24.007

- Mobile Radio Interface Layer 3 Specification–Core Network TS 24.008
- PP SMS Support on Mobile Radio Interface TS24.011

## 5.5 GSM Protocol Specifications

- Mobile Radio Interface Layer 3 Specification, Radio Resource Control Protocol TS 04.18
- Mobile Station–Base Station System (MS–BSS) interface; Data Link (DL) Layer Specification TS 04.06
- Digital Cellular Telecommunications System (Phase 2+); Multiplexing and Multiple Access on the Radio Path TS 05.02
- Technical Specification Group GERAN; Channel coding TS 05.03
- Digital Cellular Telecommunications System (Phase 2+); Radio Subsystem Link Control TS 05.08
- Digital Cellular Telecommunications System (Phase 2+); Radio Subsystem Synchronization TS 05.10

## 5.6 GPRS Protocol Specifications

- Overall Description of the GPRS Radio Interface; stage 2 TS 3.64
- Mobile Radio Interface Layer 3 Specification TS 04.08
- Mobile Radio Interface Layer 3 Specification: Radio Resource Control Protocol TS 04.18
- General Packet Radio Service (GPRS): Mobile Station (MS)–Base Station System (BSS) interface; Radio Link Control/Medium Access Control (RLC/MAC) protocol TS 04.60
- Mobile Station–Serving GPRS Support Node (MS–SGSN) Logical Link Control (LLC) Layer Specification TS 04.64
- Mobile Station–Serving GPRS Support Node (MS–SGSN); Subnetwork Dependent Convergence Protocol (SND CP) TS 04.65
- Multiplexing and Multiple Access on the Radio Path TS 05.02
- Channel Coding TS 05.03
- Modulation TS 05.04
- Radio Transmission and Reception TS 05.05
- General Packet Radio Service (GPRS); Stage 1 TS 22.060
- Mobile Execution Environment (MexE) TS 23.057
- General Packet Radio Service (GPRS) Service description; stage 2 TS 23.060

## 5.7 General Specifications

- UE Capability Requirements TR 21.904
- UE Radio Access Capabilities TR 25.926
- Vocabulary TR 25.990

- Radio Interface Protocol Architecture TS 25.301
- Services Provided by the Physical Layer TS 25.302
- Synchronization in UTRAN Stage 2 TS 25.402

## 5.8 Performance/Test Specifications

- UE Radio Transmission and Reception (FDD) TS 25.101
- Common Test Environments for User Equipment (UE) TS 34.108
- Special Conformance Testing Functions TS 34.109
- Terminal Conformance Specification TS 34.121
- User Equipment (UE) Conformance Specification; Part 1: Protocol Conformance TS 34.123-1
- User Equipment (UE) Conformance Specification; Part 2: Protocol Conformance TS 34.123-2

## 5.9 SIM Specifications

- SIM and IC Card Requirements TS 21.111
- 3rd Gen. Partnership Proj Tech. Spec. Group Terminals; SIM App. Toolkit (USAT) TS 31.111



# 6 Packing List

This chapter describes the items contained in the package of the E367.

Table 6-1 lists the items contained in the package of the E367.

**Table 6-1** Packing list of the E367

Item	Quantity	Remarks
HUAWEI E367 HSPA+ USB Rotator	1	Standard
HUAWEI E367 HSPA+ USB Rotator Quick Start	1	Standard
USB external cable	1	Optional
Micro SD Card	1	Optional

# A

## Acronyms and Abbreviations

---

<b>3GPP</b>	3rd Generation Partnership Project
<b>APN</b>	Access Point Name
<b>ARPU</b>	Average Revenue Per User
<b>BSS</b>	Base Station Subsystem
<b>CM</b>	Connection Management
<b>CS domain</b>	Circuit Switched domain
<b>EDGE</b>	Enhanced Data Rates for GSM Evolution
<b>EGPRS</b>	Enhanced GPRS
<b>FDD</b>	Frequency Division Duplex
<b>GERAN</b>	GSM/EDGE Radio Access Network
<b>GPRS</b>	General Packet Radio Service
<b>GSM</b>	Global System for Mobile Communications
<b>HSPA+</b>	High-Speed Packet Access Plus
<b>HSUPA</b>	High-Speed Uplink Packet Access
<b>HSDPA</b>	High-Speed Downlink Packet Access
<b>LED</b>	Light Emitting Diode
<b>MAC</b>	Medium Access Control
<b>MexE</b>	Mobile Execution Environment
<b>MM</b>	Mobility Management
<b>Modem</b>	Modulator Demodulator
<b>MS</b>	Mobile Station
<b>MSC</b>	Mobile Switching Center
<b>NAS</b>	Non-Access Stratum

<b>OS</b>	Operating System
<b>PC/SC</b>	Personal Computer/Smart Card
<b>PIN</b>	Personal Identification Number
<b>PnP</b>	Plug and Play
<b>PP</b>	Point-to-Point
<b>PS domain</b>	Packet Switched domain
<b>PUK</b>	PIN Unblocking Key
<b>RF</b>	Radio Frequency
<b>RLC</b>	Radio Link Control
<b>RRC</b>	Radio Resource Control
<b>SGSN</b>	Serving GPRS Support Node
<b>SIM</b>	Subscriber Identity Module
<b>SMS</b>	Short Messaging Service
<b>SNDCP</b>	Subnetwork Dependent Convergence Protocol
<b>TR</b>	Technical Report
<b>TS</b>	Technical Specification
<b>UE</b>	User Equipment
<b>UMTS</b>	Universal Mobile Telecommunications System
<b>USAT</b>	USIM Application Toolkit
<b>USB</b>	Universal Serial Bus
<b>USIM</b>	UMTS Subscriber Identity Module
<b>UTRAN</b>	UMTS Terrestrial Radio Access Network
<b>WCDMA</b>	Wideband Code Division Multiple Access